


VNX - A

Module compatible with a VELUX® KMG100 window actuator drive

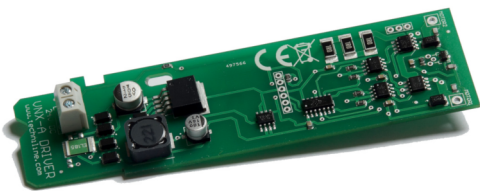

Technical specifications:

Input voltage range	15...25V DC
Maximal current consumption	0.65A
Current consumption while operation	approx. 0.35A
Stand-by current consumption	0.02A
Operating temperature range	-25....+85°C

VNX-A module is compatible with VELUX® KMG100 window actuator drive.

It allows interfacing the drive to a wide variety of an intelligent building systems (i.e. KNX, LCN, Loxone, MODBUS)

Features

- automatic shutdown on overload detection (overload protection)
- automatic shutdown once the limit position is reached (full open/close)
- protection of a supply line from overloading
- control over module is strictly electronic, with no mechanical components incorporated (no relays) what significantly extends the reliability in time

Warranty

Product is covered with 24 months warranty

Compatibility

Product comply with IEC 63044-3 standard

LEGAL DISCLAIMER

Any alteration made to the VELUX® products using our units voids VELUX® warranty.

You are asked to remove the CE-marking from the modified VELUX® product, as when modified, it is no longer in force.

Removing the rain sensor creates a risk of water damage.

Your installation has to be protected against unexpected movement and provide a safety against entrapment and meet other requirements in accordance with applicable regulations.

VELUX®, io-homecontrol® are a registered trademarks and belong to their respective owners,