


## VNX - C

### MODULE COMPATIBLE WITH VELUX® KMG100K WINDOW ACTUATOR

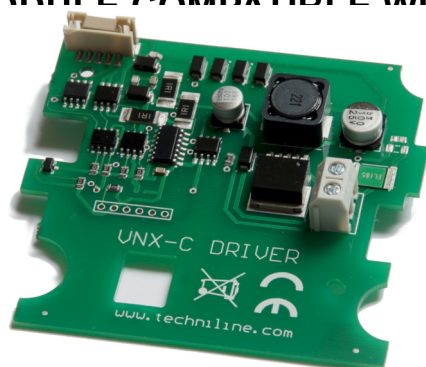

### Technical specifications:

Input voltage range	15...25V DC
Maximal current consumption	0.65A
Current consumption while operation	approx. 0.35A
Stand-by current consumption	0.02A
Operating temperature range	-25....+85°C

VNX-C module is compatible with VELUX® KMG100K window actuator drive. It allows interfacing the drive to a wide variety of an intelligent building systems (i.e. KNX, LCN, Loxone, MODBUS).

### Features

- automatic shutdown on overload detection (overload protection)
- automatic shutdown once the limit position is reached (full open/close)
- protection of a supply line from overloading
- control over module is strictly electronic, with no mechanical components incorporated (no relays) what significantly extends the reliability in time

### Warranty

Product is covered with 24 months warranty

### Compatibility

Product comply with IEC 63044-3 standard.

### LEGAL DISCLAIMER

Any alteration made to the VELUX® products using our units voids VELUX® warranty. You are asked to remove the CE-marking from the modified VELUX® product, as when modified, it is no longer in force. Removing the rain sensor creates a risk of water damage. Your installation has to be protected against unexpected movement and provide a safety against entrapment and meet other requirements in accordance with applicable regulations.

VELUX®, io-homecontrol® are a registered trademarks and belong to their respective owners,